



**VERTIV™**

# **CONTROL ROOM INFRASTRUCTURE**

VERTIV™ KNÜRR ERGOCON®

The ultimate 24/7 console  
for critical operations



- Knürr Ergocon® 4
- Knürr Ergocon®  
**Rectangular Console** 8
- Knürr Ergocon®  
**Curved Console** 10
- Knürr Ergocon®  
**Configurator** 16
- Knürr Ergocontrol 18


## THE ULTIMATIVE 24/7 CONSOLE FOR CRITICAL OPERATIONS

The new **Knürr Ergocon®** console sets the standard for the most demanding 24-hour deployments in various types of control rooms and control suites:

- Best possible ergonomics, using multidimensional setting options on three axes (table height, monitor height, and viewing distance).
- Solutions for individual areas of application and perfect device integration from a wide variety of console models.
- In combination with Knürr Ergocontrol, each user can have customized settings. This free seating concept guarantees efficient workstation ergonomics.

With many years of experience in equipping mission-critical control centers, our Vertiv workstation experts design perfectly adapted workstations for emergency service organizations such as fire departments, rescue services, disaster and civil protection, police, as well as for private security centers.



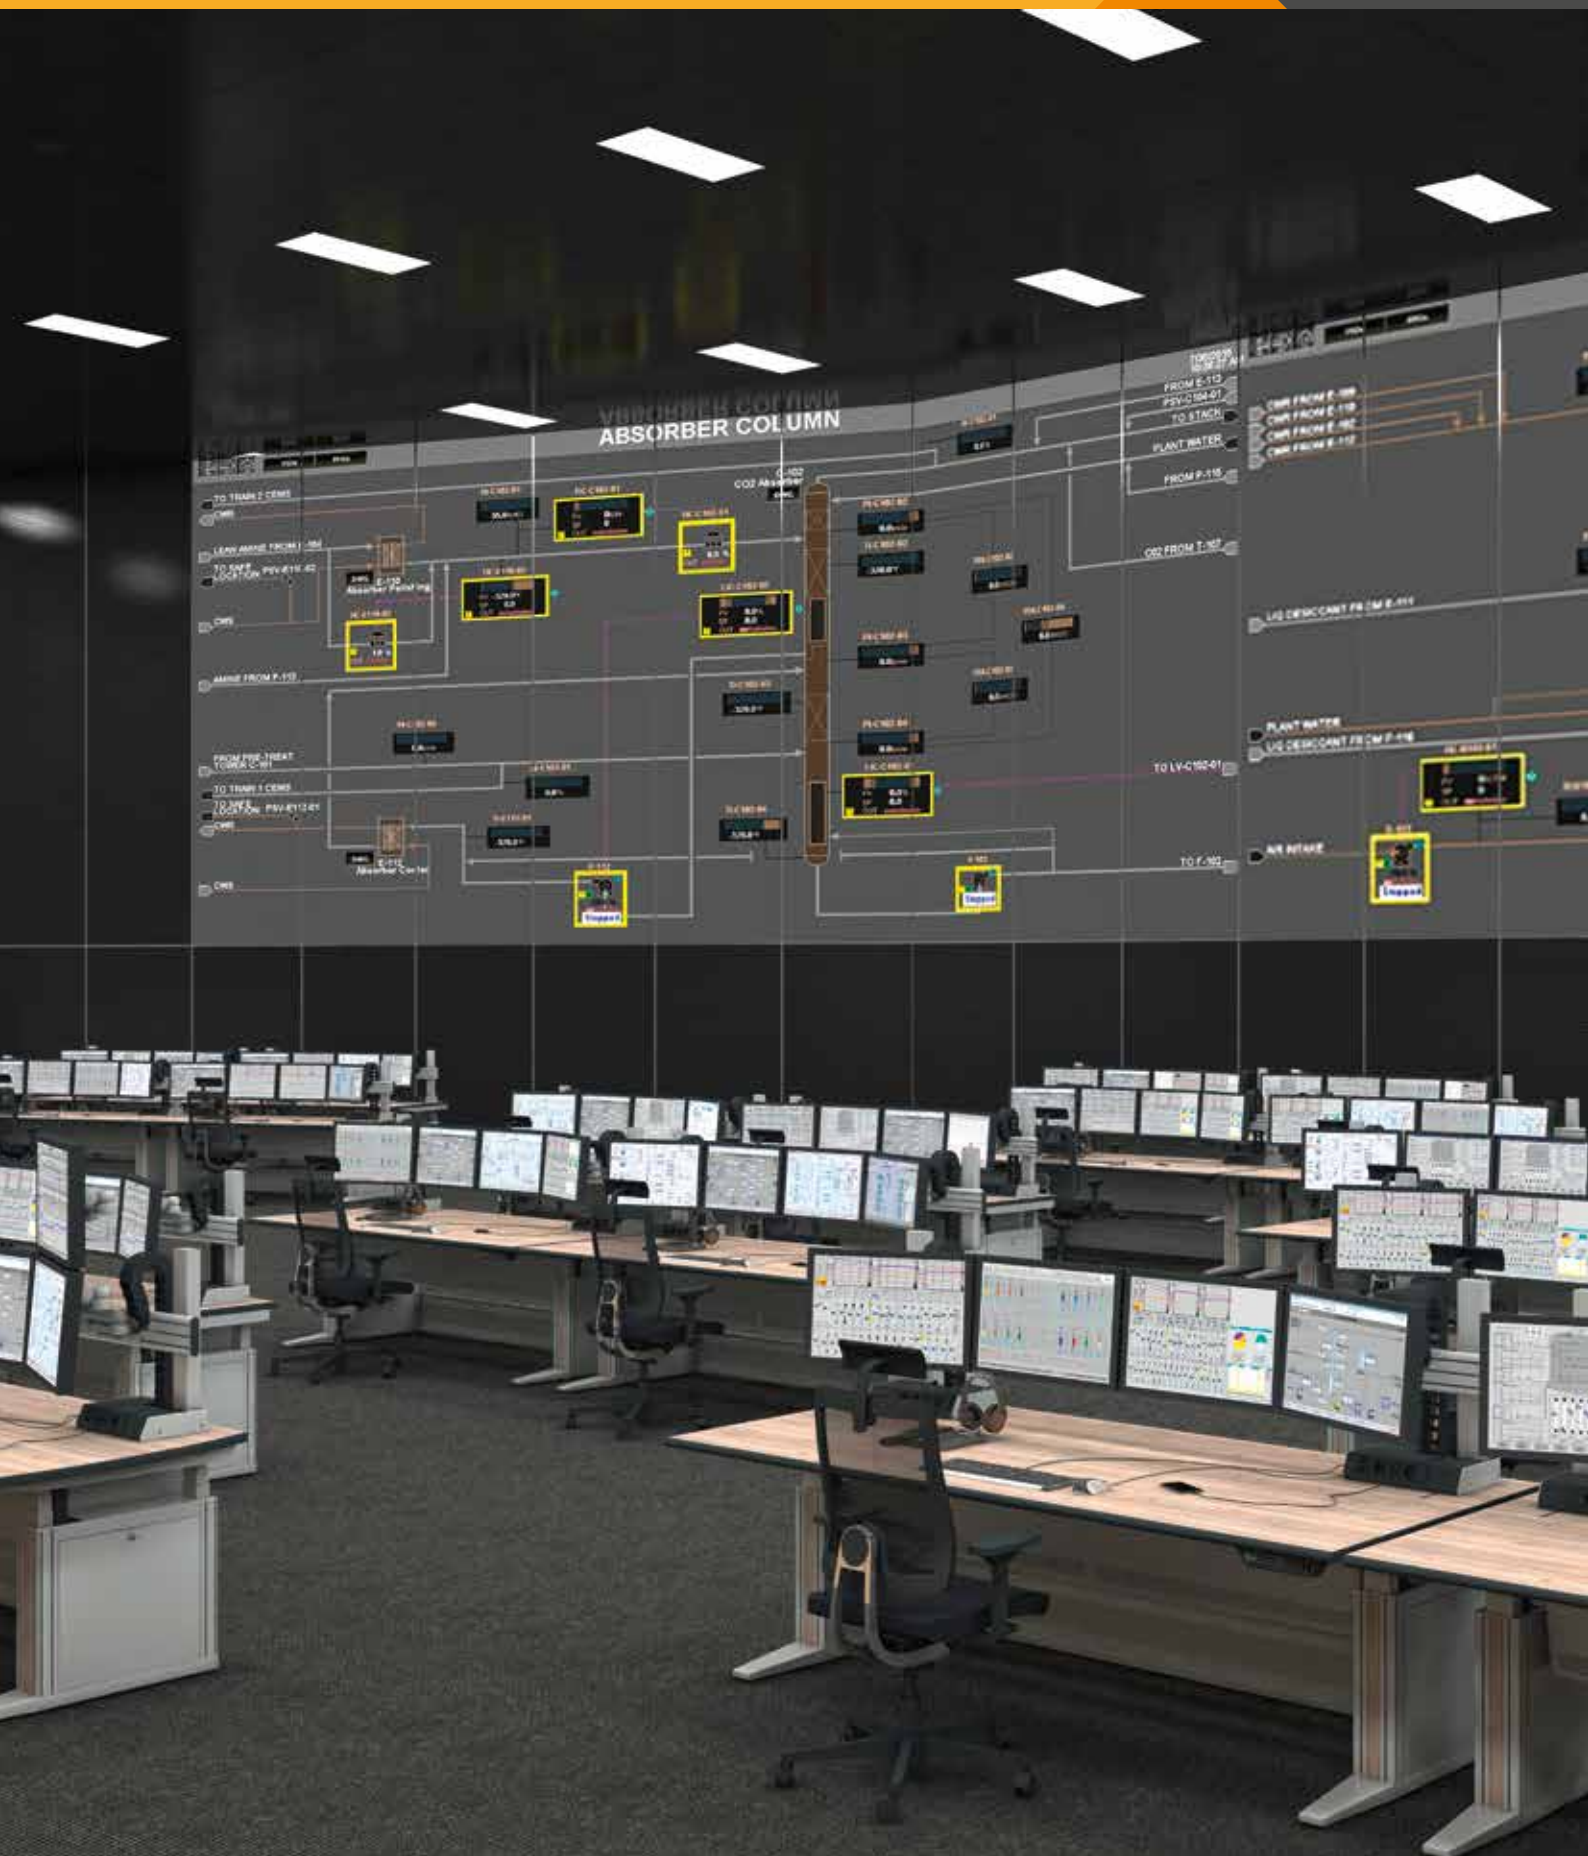

## Knürr Ergocon®


with new KVM-ready technology cabinet in base

### Intelligent cable routing

Cables are routed in a roomy and hidden vertical support on the side of the table, accessible from both inside and out.

### High-quality desk tops

- Available in rectangular and curved designs
- Single-level or bi-level work surface.
- Framed by ergonomic and heavy-duty Knürr ErgoSoft edging.

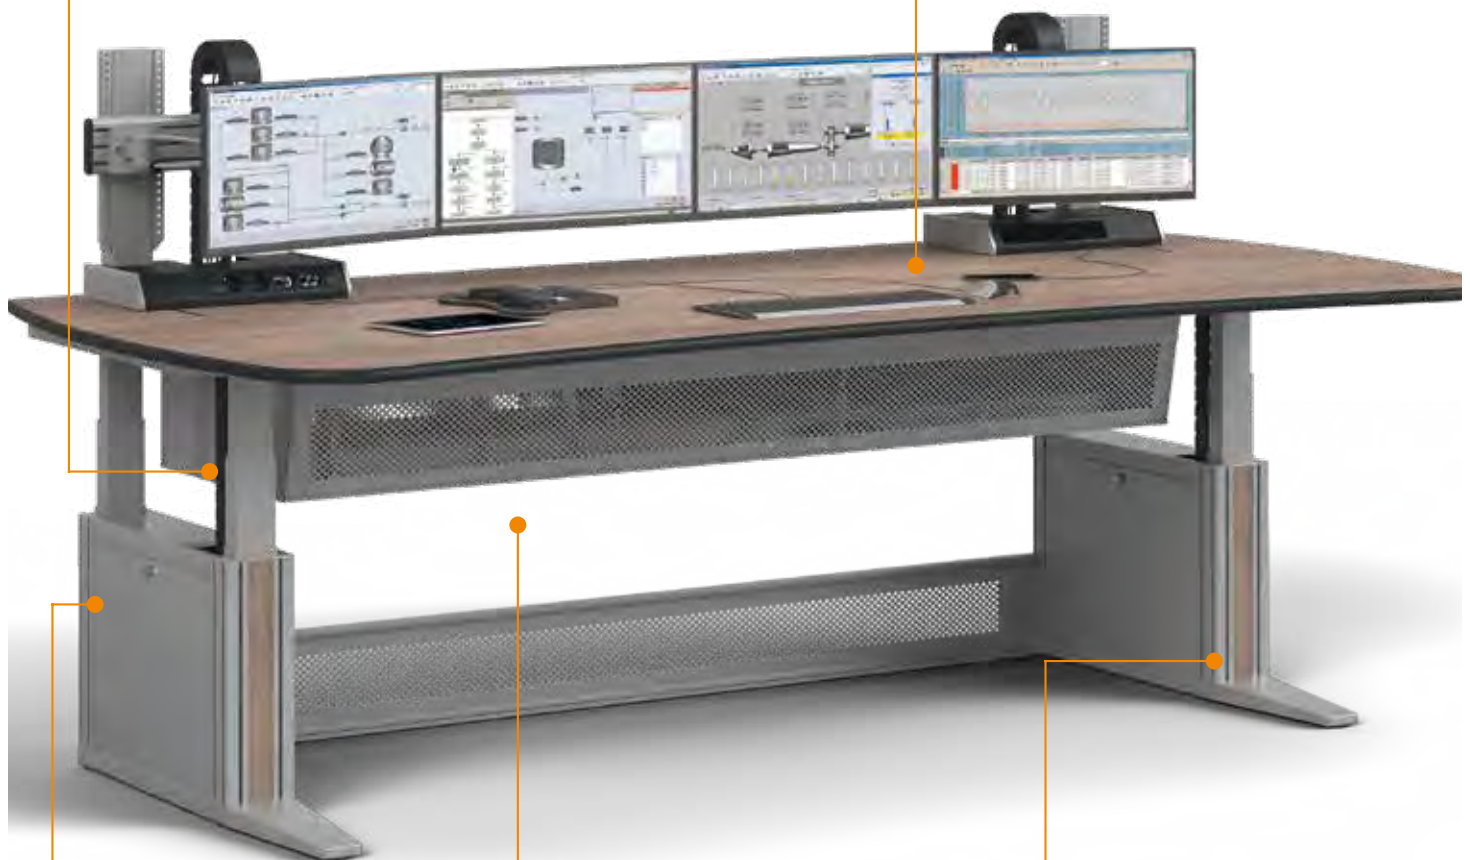

### Modular console system

Choice between four different base frame widths

- 1400 mm
- 1800 mm
- 2200 mm
- 2x1400 mm for extra-large consoles

### Standard compliance

- DIN EN ISO 11064: Ergonomic design of control centers
- DIN EN 527 defines workstation types with minimum requirements for range of settings:  
Type A: min. 650 to 1,250 mm  
Type D: min. 680 to 1,180 mm  
We fulfill both requirements!\*

### Stability and design

Stable c-base frame for maximum legroom.  
Optional colored decorative strips made of extruded aluminum for a personal touch.


\* Depending on the corresponding console design

### Modern colors

Base frame in RAL 9006 White aluminium. Tabletop, decorative strips, and wood trim on technology cabinet available in six different designs.

### Secure monitor connection

Highest flexibility using single-level and two-level monitor rails, with the option of motorized height and depth adjustment.

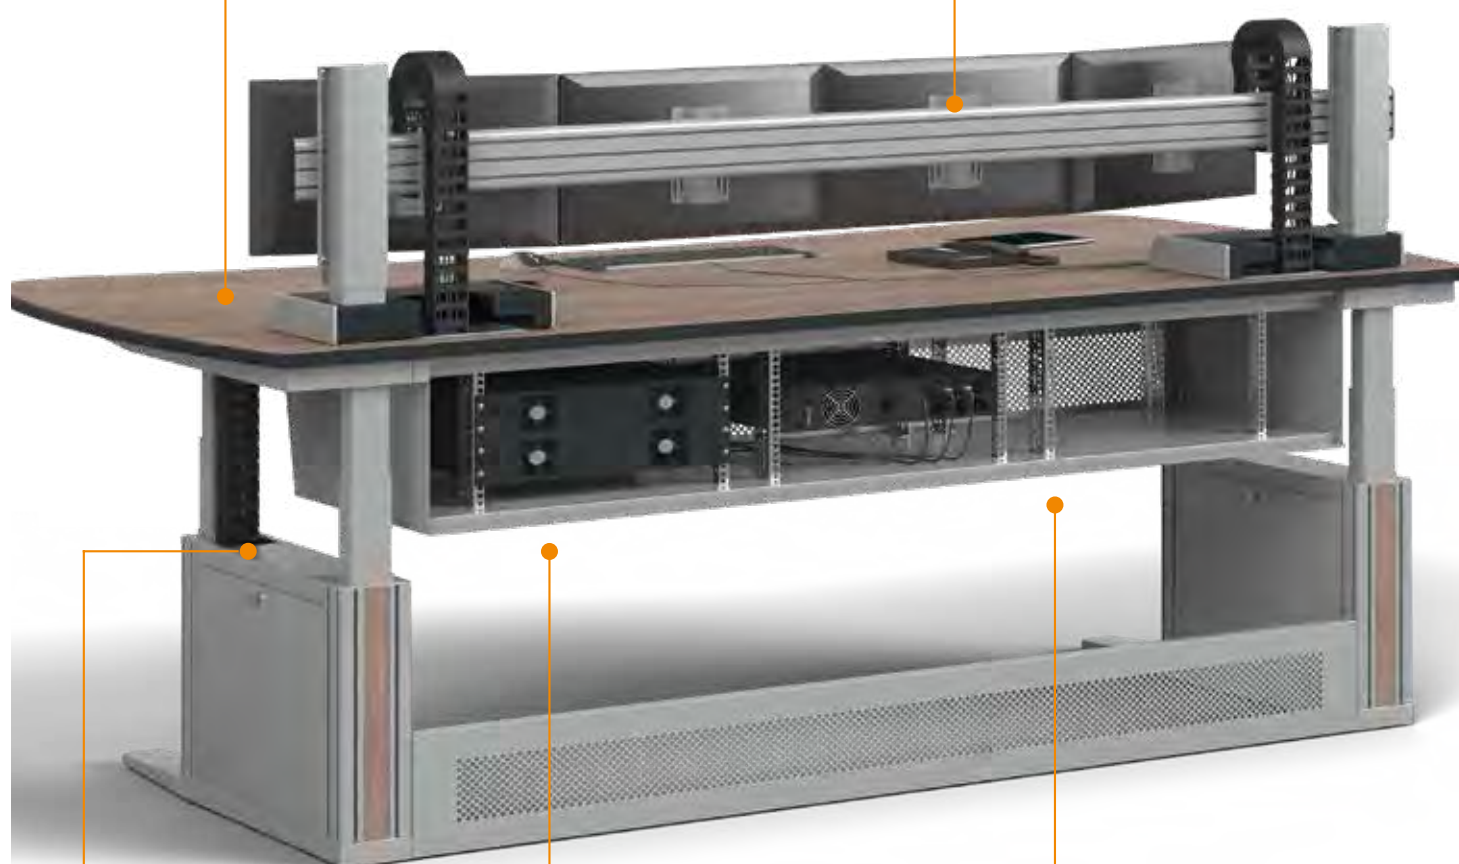

### Comfortable height adjustment

Simple height adjustment for working and monitor levels, with memory function (standard).

### Integrated passive ventilation concept

Guarantees maximum reliability of IT components.

### KVM-ready technology cabinet in base

With up to 3x6 RU 19" installation space for the perfect integration of KVM switches, SFF-PC, power distribution, cable management accessories, and much more.

## Knürr Ergocon®

The right console for your specific application!

To keep up with the growing requirements for control center consoles, we have developed the new Knürr Ergocon console in three different designs:

**The common element here is the new multifunctional side compartment.**

### Clever side compartment with multiple features:

#### Collision protection


using integrated piezoelectric sensors.

#### Secure cable routing

with optimal bending.

#### Various installation options

Integration of data and power transfer points using the corresponding Knürr accessories.

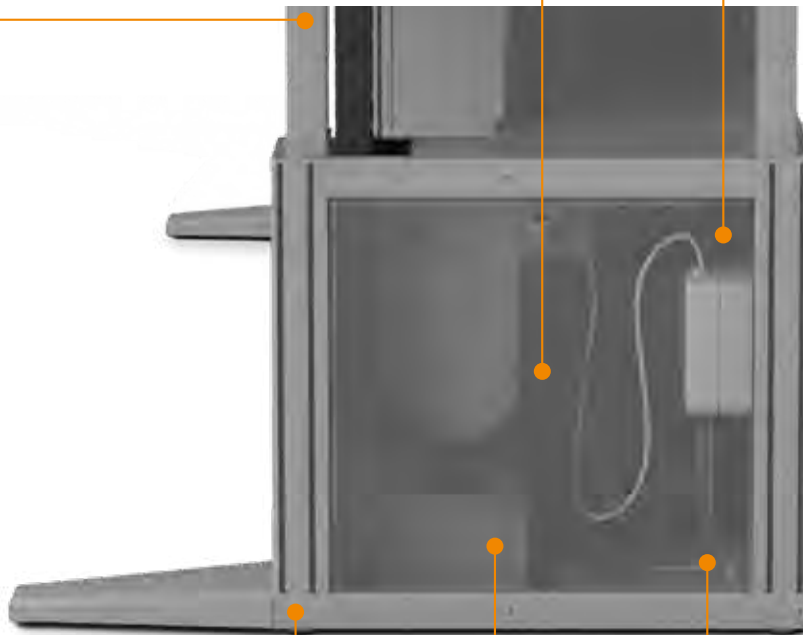

#### Complete grounding concept

#### Maximum accessibility

for maintenance purposes, with removable side covers (optionally lockable).

#### Concealed cables

through doubled bottom and spacious openings.

## 1 Installation module

Area of application:  
Minimal technical integration with  
max. 3x1 RU 19" installation space  
under the tabletop, typical for video  
extender applications.



## 2 KVM-ready technology cabinet in base

Area of application:  
Up to 3x6 RU for integrating  
technology, typical for KVM  
applications, SFF or micro-  
workstations.



## 3 Workstation technology cabinet in base

Area of application:  
Maximum technical integration for  
tower or 19" workstation requiring  
much space, typical for powerful  
servers and rack-mounted equipment  
directly on the console.



## Rectangular consoles:



### Application:

**Especially suited for setting up efficiently in rows in front of large-format screens on a wall.**

A single console can also be efficiently placed into the existing infrastructure, saving space due its rectangular shape. Rectangular workstations are especially recommended for changing activities between manual writing work and computer-supported work.

Our rectangular consoles are available not only in a single-level design, but also as a bi-level table, with the rear level able to drop down 70 mm.

To meet your specific requirements, you have a choice between **four different widths**:

- **1600 mm**  
(base width 1400 mm)
- **2000 mm**  
(base width 1800 mm)
- **2400mm**  
(base width 2200mm)
- **3000 mm**  
(base width 2x1400 mm)




Single-level work surface




Bi-level work surface

## Dimensions:

### Single-level work surface:

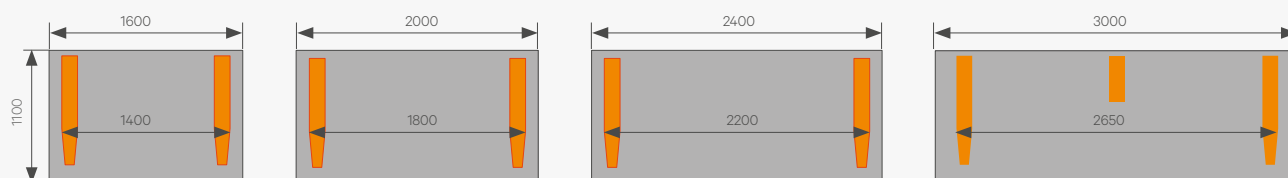

### Bi-level work surface:

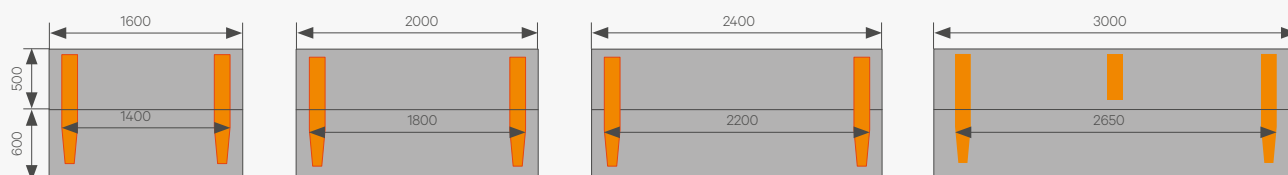

## Curved consoles:



Convex arrangement,  
large radius



Convex arrangement,  
small radius



Concave arrangement

## Application:

### **Especially suited for circular arrangement of consoles in control rooms.**

The innovative curved tabletops offer clear advantages: They can be arranged in various curve shapes, whether tight or open, concave or convex.


For single consoles, the ergonomically rounded tabletops play a significant role in reducing the risk of hitting table corners in heavily trafficked control rooms.

Our curved consoles are also available in a single-level design, as well as a bi-level table, with the rear level capable of lowering 70mm. To meet your specific requirements, you have a choice between **four different widths**:


- **1800 mm**  
(base width 1400 mm)
- **2200mm**  
(base width 1800mm)
- **2600mm**  
(base width 2200mm)
- **3100 mm**  
(base width 2x1400 mm)

## Dimensions:

### Single-level work surface:

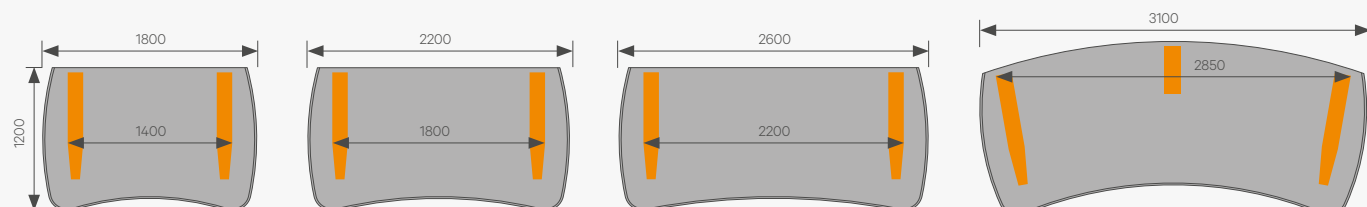

### Bi-level work surface:

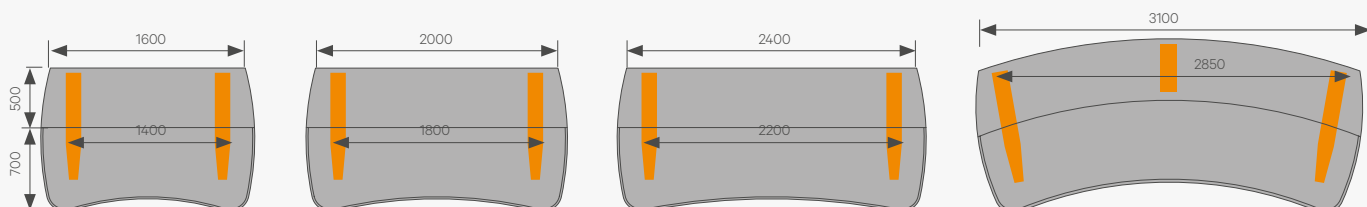

## Monitor levels:

The monitor level is the main element found above the working surface. To offer the user optimal ergonomics,

Knürr has three different designs for monitor placement:

### 1. Heightfix (H-Fix)



Hfix single-level



Hfix two-level

### 2. Height-adjustable (H-A)



H-A single-level



H-A two-level

### 3. Height/depth-adjustable (H/D-A)



H/D-A single-level



H/D-A two-level

#### 1. Heightfix (H-Fix):

The horizontal function rail with integrated cable duct guarantees secure and stable monitor mounting. This allows the tabletop below the monitor to remain free for other devices or desk attachments. Large-volume energy chains provide for protected and orderly cable routing.

The patented multi-function unit establishes the basic framework for any monitor mount. It incorporates functions such as concealed

cable routing and mounting for the vertical columns (as well as the optional Knürr-DICON personal docking units).


#### 2. Height-adjustable (H-A):

Above and beyond the functions of the H-Fix monitor level, the H-A version offers infinitely variable electrical height adjustment for monitors. Secure operation is always certain with the integrated piezoelectric sensors for collision protection.

#### 3. Height- and depth-adjustable (H/D-A):

In addition to the functions of the H-Fix and H-A monitor levels, this version is equipped with completely concealed, electrical depth adjustment. This allows the user to adjust all levels as they see fit for the best possible ergonomics and the optimal viewing distance to the monitors.

## Knürr multi-function unit:

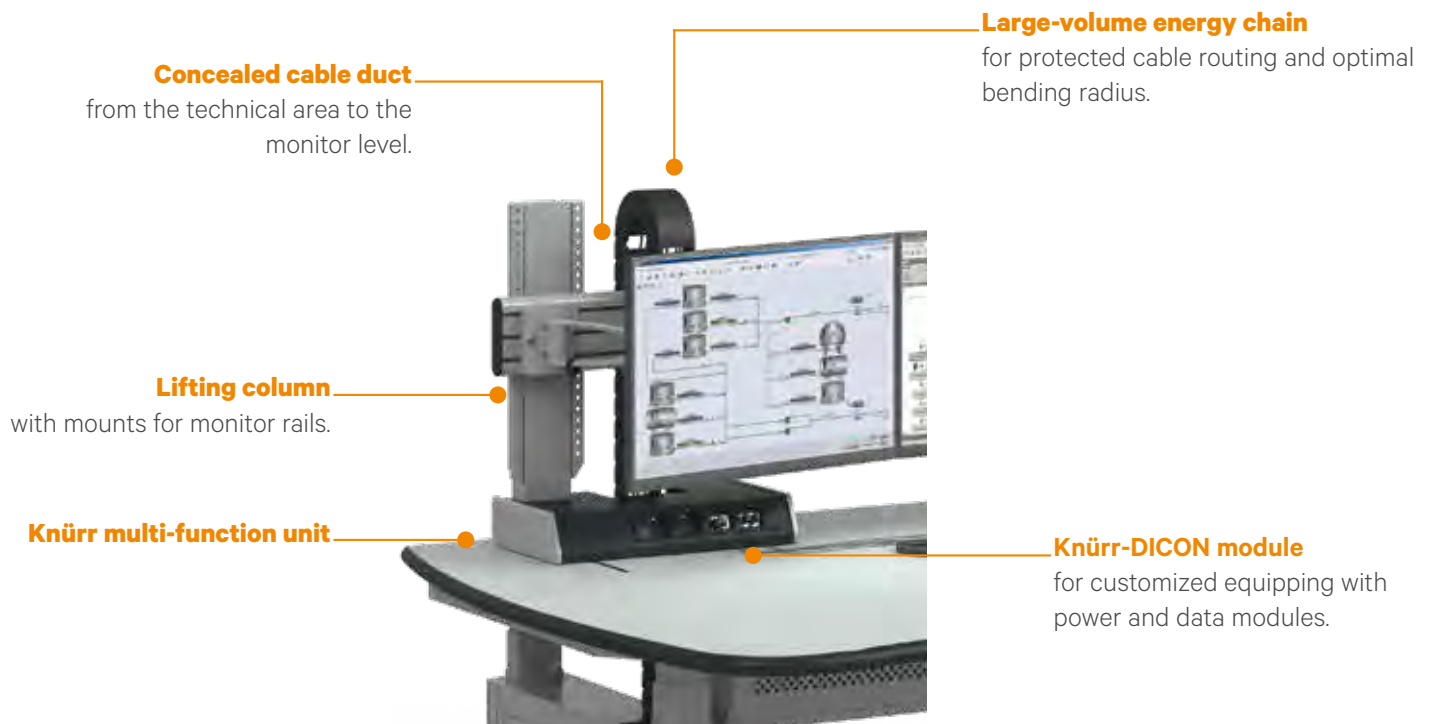

## Colors:



- Tabletop in **RAL7035, Light grey**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

### Depending on design:

- Installation module or KVM technology cabinet in base in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium

.A



- Tabletop in **Nelson oak wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

### Depending on design:

- Installation module or KVM technology cabinet in base in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Nelson oak wood pattern**

.B



- Tabletop in **Pine black wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

### Depending on design:

- Installation module or KVM technology cabinet in base in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Pine black wood pattern**

.C



- Tabletop in **Nano bronzo doha**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

### Depending on design:

- Installation module or KVM technology cabinet in base in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium

.D



- Tabletop in **Beech wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

### Depending on design:

- Installation module or KVM technology cabinet in base in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Beech wood pattern**

.E



- Tabletop in **Maple wood pattern**
- Sheet metal parts and aluminum profiles in **RAL9006, White aluminium**

### Depending on design:


- Installation module or KVM technology cabinet in base in RAL9006, White aluminium
- Workstation technology cabinet in base in RAL9006, White aluminium with front panel in **Maple wood pattern**

.F

## Decorative panels:



RAL7021,  
Black grey

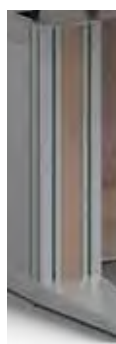

Nelson oak  
wood pattern



Pine black  
wood pattern



Nano bronzo  
doha



Beech wood  
pattern



Maple wood  
pattern



Individual  
corporate  
logo



## Knürr Ergocon®

Configurator



### The possibilities are impressive!

**Over 2,000 variations are available, using the configurable part numbers.**

This lets you put together the perfect console, designed specifically to meet your tastes and requirements.

You can include an installation module, KVM-ready technology cabinet in the base, rectangular or curved tabletop, single-level or bi-level design, and up to two-level monitor rails with depth adjustment.

**You will always find the right Knürr console for your particular application!**

Using the **Knürr Ergocon® configuration table**, you can specify the console that is best for you.

**Part no.:**

**04.500.**



Base widths	Tabletop shape	Monitor level	Color
<b>A</b> = B1400 Installation module	<b>0</b> = Rectangular	<b>0</b> = without	<b>A</b> = RAL 7035
<b>B</b> = B1400 KVM-ready technology cabinet in base	<b>1</b> = Rectangular, bi-level	<b>1</b> = H-Fix single-level	<b>B</b> = Nelson oak
<b>C</b> = B1400 Workstation technology cabinet in base	<b>2</b> = Curved	<b>2</b> = H-Fix two-level	<b>C</b> = Pine black
<b>D</b> = B1800 Installation module	<b>3</b> = Curved, bi-level	<b>3</b> = H-A single-level	<b>D</b> = Nano bronzo doha
<b>E</b> = B1800 KVM-ready technology cabinet in base		<b>4</b> = H-A two-level	<b>E</b> = Beech
<b>F</b> = B1800 Workstation technology cabinet in base		<b>5</b> = H/D-A single-level	<b>F</b> = Maple
<b>G</b> = B2200 Installation module		<b>6</b> = H/D-A two-level	
<b>H</b> = B2200 KVM-ready technology cabinet in base			
<b>I</b> = B2200 Workstation technology cabinet in base			
<b>J</b> = 2x B1400 Installation module			
<b>K</b> = 2x B1400 KVM-ready technology cabinet in base			
<b>L</b> = 2x B1400 Workstation technology cabinet in base			

### Sample configuration (see image, left):

Base width: B2200 mm workstation technology cabinet in base  
 Tabletop: curved, single-level  
 Monitor level: height/depth-adjustable, single-level  
 Tabletop color: RAL7035, Light grey



Base widths	Tabletop shape	Monitor level	Color
<b>I</b>	<b>2</b>	<b>5</b>	<b>A</b>




**Configuration number:**


**04.500.I25.A**

## Knürr Ergocontrol

Intelligent control for workstations in control rooms!

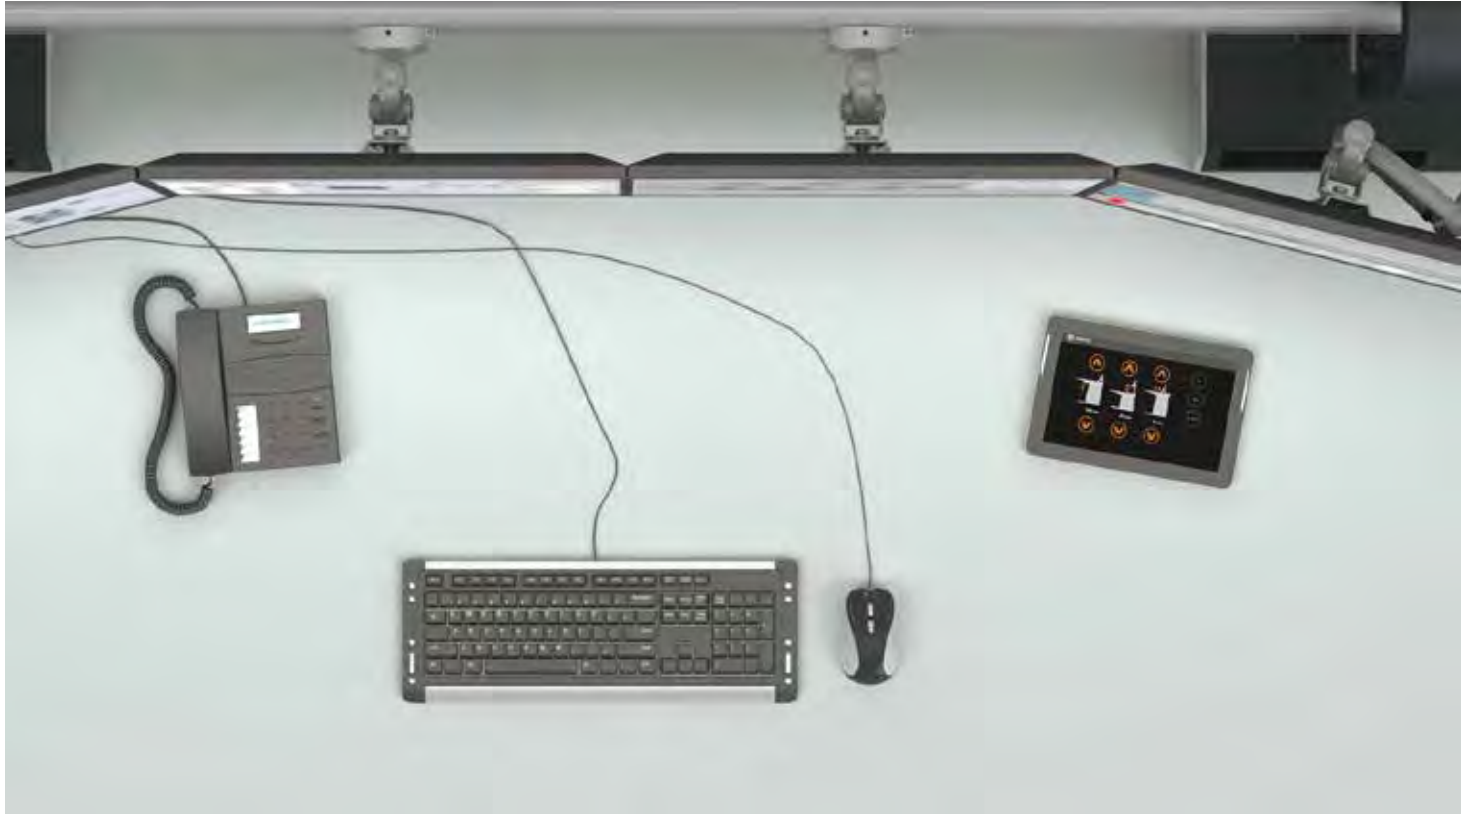

### Advantages

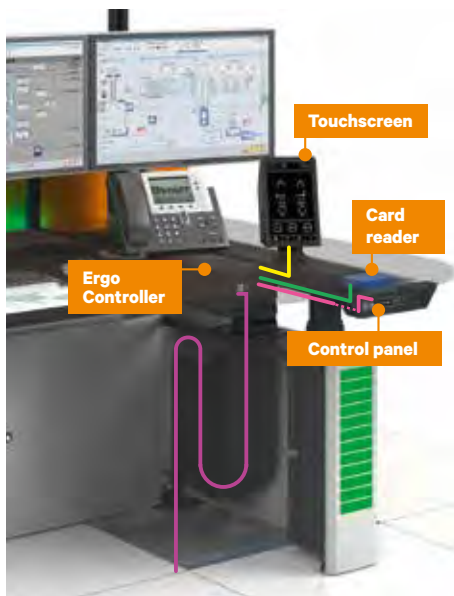


**Ergonomics as a factor in productivity and wellbeing – easy to handle and comfortable to use.**

Up to 1,000 different users can log in to the console via RFID and store their own personal settings for seated position, standing position, and monitor distance using the Knürr Ergocontrol system. Stored settings can be called up at any console networked to a user group, which means up to 48 different consoles are ready to be automatically adjusted to any user in that group.

- Smart **multi-user** control
- Improves the actual use of the setting options
- **Free choice of seats** in large control rooms
- **User-specific storage of settings**
- Future-proof **using open interfaces**


## Main features

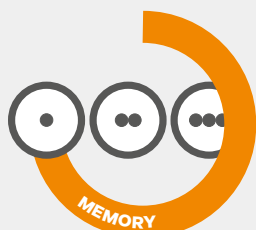

Up to three presets




Omnocard Reader




Up to 48 consoles  
per group




Upgradable



Single workstation  
or network



Open interfaces for  
building technology

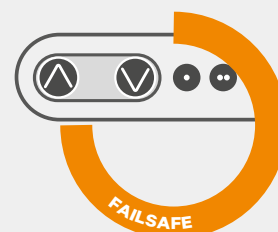

Parallel tried-and-tested  
standard controller



Accessories

Flat display mount, decorative panels, and integrated technology




Flat display mount


- Flat display mount for displays with VESA mount, 100 mm
  - With integrated cable duct
  - For mounting on Knürr IM function rail
  - Integrated quick-mount system
- **Material / Surface Type D-G**
    - Swivel arms: Die-cast aluminum, powdered RAL 9006 White aluminium
    - Adapter: Sheet steel powdered smooth, RAL9006 White aluminium
    - Covers on monitor arms: Plastic, clear
- **Scope of supply**
    - 1x flat display mount
    - with height compensation plate
    - Fasteners
  - **How supplied**
    - In sets




Version	Height compensation plate	Load capacity	Part No.	PU
Type IM short (145 mm)	•	15 kg	04.501.010.7	1 pc
Type IM medium (145+150 mm)	•	15 kg	04.501.011.7	1 pc
Type IM long (145+200 mm)	•	15 kg	04.501.012.7	1 pc
Type IM double (145+200+150 mm)	•	15 kg	04.501.013.7	1 pc




Flat display mount IM short



Flat display mount IM medium (150 mm)

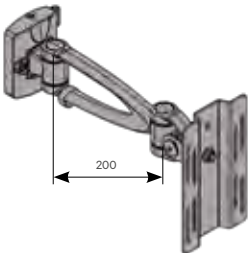

Flat display mount IM long (200 mm)

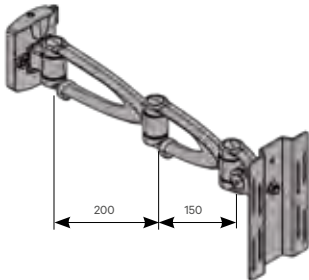

Flat display mount IM double (200 + 150 mm)

## Decorative panels

- For customized design of Ergocon aluminum profiles

- Scope of supply**
  - 1 decorative panel


Version	Part No.	PU
RAL7035, Light grey	04.501.004.A	1 pc
Nelson oak wood pattern	04.501.004.B	1 pc
Pine black wood pattern	04.501.004.C	1 pc
Nano bronzo doha	04.501.004.D	1 pc
Beech wood pattern	04.501.004.E	1 pc
Maple wood pattern	04.501.004.F	1 pc
RAL7021, Black grey	04.501.004.G	1 pc



RAL7035, Light grey



Nelson oak wood pattern

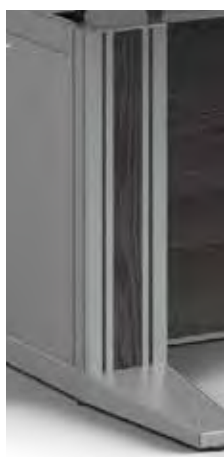

Pine black wood pattern



Nano bronzo doha



Beech wood pattern



Maple wood pattern



RAL7021, Black grey



Individual corporate logo

**Dimensions in mm:** W = width  
H = height  
D = depth  
h = installation height  
t = usable depth  
L = length

RU = Number of standard height units. 1 RU = 44.45 mm  
19" = 482.6 mm, (suited to 19" installation acc. to DIN 41494)  
PU = package unit  
kg = weight

**Conversion:** 1 inch = 25.4 mm  
1 pound = 453.6 g

Replace 'x' with the last digit of your color choice

## Knürr-Dicon for multi-function unit

- Suitable for integration in the Ergocon multi-function unit
  - Customizable power and data supply unit
  - Available in three country versions (DE-Germany, F-France, CH-Switzerland) with two or three power outlets (for CH: one or two)
  - Flexible equipping of data module elements using keystone mounts
- **Material/surface**
    - Housing: closed sheet steel profile, galvanized, powder-coated structure
    - Plastic parts: Vampamid 6 0024 VO (UL94), recyclable
    - Center core: continuous power rails, brass
  - **Approvals/certificates**
    - CE label in accordance with:
  - **Colors**
    - Housing: RAL 9005 Jet black microstructure
    - Plastic parts: black
  - **Load capacity**
    - 100–240 V AC/16 A (Schuko and France)
    - 100–240 V AC/10 A (Switzerland)
  - **Scope of supply**
    - 1 power outlet strip
    - 2 fastening brackets

Model	Input values		Input plug	Outputs		Part No.
	Voltage	Current		DE Schuko	F UTE	
4x	230 V	16 A	GST-18	2		03.300.022.8
4x	230 V	16 A	GST-18		2	03.400.022.8
4x	230 V	16 A	GST-18			03.701.012.8
4x	230 V	16 A	GST-18			03.701.021.8



4x unit Schuko



4x unit French (UTE)



4x unit Switzerland (Type 13) with 10 A fuse

## Knürr-Dicon for desk mount

- Suitable for integration into Knürr table mounting frames
  - Customizable power and data supply unit
  - Available in three country versions (DE-Germany, F-France, CH-Switzerland)
  - Two different widths (as 4x and 6x unit)
  - Flexible equipping of data module elements using keystone mounts
- Technical data same as above!**

Model	Input values		Input plug	Outputs		Part No.
	Voltage	Current		DE Schuko	F UTE	
4x	230 V	16 A	GST-18	2		03.300.022.8
4x	230 V	16 A	GST-18		2	03.400.022.8
4x	230 V	16 A	GST-18			03.701.012.8
4x	230 V	16 A	GST-18			03.701.021.8
6x	230 V	16 A	GST-18	3		03.300.033.8
6x	230 V	16 A	GST-18	4		03.300.042.8
6x	230 V	16 A	GST-18		3	03.400.033.8
6x	230 V	16 A	GST-18		4	03.400.042.8
6x	230 V	16 A	GST-18			03.701.023.8
6x	230 V	16 A	GST-18			03.701.032.8

Version	W	D	Part No.	PU
4x table mounting frames	285	160	04.501.050.8	1 pc
6x table mounting frames	385	160	04.501.051.8	1 pc



6x unit Schuko

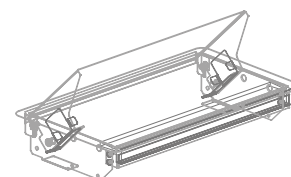


Table mounting frames



Table mounting frames

## Knürr-Dicon mounting plates and Keystone modules

Mounting plate simple	03.322.054.8
Mounting plate 1x Keystone	03.322.055.8
Mounting plate 2x Keystone	03.322.056.8
Mounting plate 1x VGA	03.322.057.8
Keystone module USB 3.0	03.322.058.1
Keystone module RJ45 Cat.6A	03.322.059.1
Keystone module HDMI	03.322.060.1
Keystone module AUDIO 3.5 mm 4-pin stereo	03.322.061.1
Keystone module VGA	03.322.062.1

**Version:** Socket – socket for all modules

	USB 3.0	RJ 45	HDMI	Audio	VGA
Mounting plate 1x Keystone	1x	1x	1x	1x	-
Mounting plate 2x Keystone	2x	2x	2x	2x	-
Mounting plate 1x VGA	-	-	-	-	1x



Mounting plate simple



Mounting plate 1x Keystone



Mounting plate 2x Keystone



Mounting plate 1x VGA

## Supply cable for Knürr-DICON unit

- Network plug CEE/VII - GST 18 socket (Wieland)
- Line H05VV-F3G 1.5 mm2
- Color
  - White

L	Part No.	PU
2.0 m	04.000.040.0	1 pc
5.0 m	04.000.041.0	1 pc



DOS00467

**Dimensions in mm:** W = width  
H = height  
D = depth  
h = installation height  
t = usable depth  
L = length

RU = Number of standard height units, 1 RU = 44.45 mm  
19" = 482.6 mm, (suited to 19" installation acc. to DIN 41494)  
PU = package unit  
kg = weight

**Conversion:** 1 inch = 25.4 mm  
1 pound = 453.6 g

Replace 'x' with the last digit of your color choice

Data transfer point RJ45

- Suited for the installation of up to five RJ45 keystone elements.
- For simple attachment in Ergocon side compartment.
- **Material/surface**
  - Sheet steel, powder-coated RAL9006, White aluminium
- **Scope of supply**
  - 1x mounting bracket with fasteners
- **How supplied**
  - In sets
- **Note**
  - Please order the accompanying Keystone elements separately.

Version	Part No.	PU
Data transfer point	04.501.035.7	1 pc
Keystone module RJ45 Cat.6A	03.322.059.1	1 pc



Support bracket for power distributor

- Suitable for installation of max. 2 Knürr 19" DI strip PDUs or a power distributor box.
- For simple attachment in Ergocon side compartment.
- **Material/surface**
  - Sheet steel, powder-coated RAL9006, White aluminium
- **Scope of supply**
  - 1x support bracket with fasteners
- **How supplied**
  - In sets
- **Note**
  - Please order power distribution units separately.

Version	Part No.	PU
Support bracket	04.501.036.7	1 pc



## 19" swivel frame, 4 RU

- Suitable for consoles with technology cabinet in workstation base
- Attachment for 19" swivel frame on the floor frame of the technology cabinet in the workstation base using depth members
- Assembly of equipment on 19" profile using hole matrix and cage nuts
- **Material/surface**
  - Sheet steel, powder-coated, RAL7021, Black grey

- **Scope of supply**
  - 1x 19" frame
- **How supplied**
  - Pre-mounted
- **Note**
  - Please order suitable fastening materials for 19" components with order.



Version	Part No.	PU
19" swivel frame, 4 RU	04.501.040.8	10 pc

## Cable bridge


- Suitable for consoles with technology cabinet in workstation base
- **Material**
  - Cable bridge, steel, coated
- **Scope of supply**
  - 1x cable bridge with fasteners
- **How supplied**
  - In sets
- **Dimensions**
  - Height 60 mm, depth 60 mm length fits to technology cabinet in the base



Version	Part No.	PU
For base width 1400 mm	04.501.030.9	1 pc
For base width 1800 mm	04.501.031.9	1 pc
For base width 2200 mm	04.501.032.9	1 pc

## 19" frame, 8 RU

- Suitable for consoles with technology cabinet in workstation base
- 19" frame for attachment of 19" components and mounting plates
- Attachment of 19" frame on the floor frame of the technology cabinet in the workstation base using depth members, thereby adjustable
- Mounting equipment on 19" profile using t-slots and speed nuts, thereby allowing infinite height adjustment
- **Material**
  - 19" adapter plate and frame cover made of sheet steel (powder-coated structure)
  - 19" profile made of extruded aluminum, blank
- **Surface**
  - Adapter plate RAL 9011, Graphite black
- **Scope of supply**
  - 1 adapter plate
  - 1 frame cover
  - 2 depth members
  - 2 19" profiles
- **How supplied**
  - Pre-mounted
- **Dimensions**
  - Please order suitable fastening materials for 19" components with order.

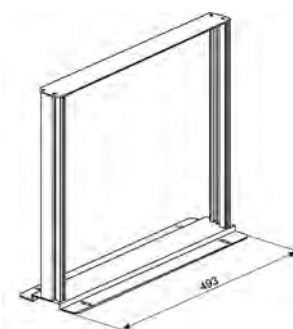

KON20032

Version	Part No.	PU
19" frame, 8 RU	04.412.650.7	1 pc

**Dimensions in mm:** W = width  
H = height  
D = depth  
h = installation height  
t = usable depth  
L = length

RU = Number of standard height units, 1 RU = 44.45 mm  
19" = 482.6 mm, (suited to 19" installation acc. to DIN 41494)  
PU = package unit  
kg = weight

**Conversion:** 1 inch = 25.4 mm  
1 pound = 453.6 g

Replace 'x' with the last digit of your color choice

19" accessories

Suitable for consoles with KVM-ready technology cabinet in the base!





19" shelf, 2 RU  
fixed

- For mounting in cabinets with fixed 19" installation, frontal
- Simple and fast mounting on 19" profiles
- Also for swivel frame in 19" cabinet and 19" housing
- **Surface/color**
  - Powder-coated structure
  - RAL 7035 Light grey
- **Material**
  - Sheet steel 1.5 mm
- **Load capacity**
  - 20 kg static
- **Scope of supply**
  - 1 shelf, fixed
  - Mounting material
- **How supplied**
  - In sets

W	H	W x L	Part No.	PU
482.6	88.1	442 x 280	01.113.736.1	1 pc
482.6	88.1	442 x 380	01.113.737.1	1 pc



MIR00373

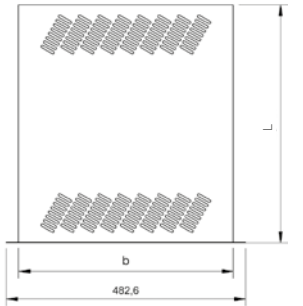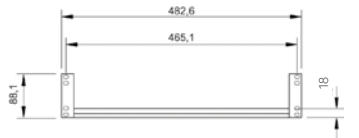

MIR00375

## 19" cable routing plate, 1 RU

- For orderly cable routing.
- **Material/surface**
  - Type 1: Front plate sheet steel 1.5 mm, powder-coated.
- **Color**
  - RAL 7035 Light grey
- **Outer dimensions**
  - **Cable routing:**
    - Type 1: 55 x 22 mm, plastic
- **Scope of supply**
  - 1 19" front plate
  - 5 cable routers
- **How supplied**
  - Pre-mounted
- **Note**
  - When ordering, please also order suitable front plate fasteners

W	RU	Mount depth	Version	Part No.	PU
483	1	from 80 mm	Type 1	05.040.111.1	1 pc



## Cable router ring

- For orderly cable routing
- Dimensions: outer 61 mm x 42.5 mm. Inner 52 mm x 23 mm.
- **Material/surface**
  - Cable holder: PPO, similar to RAL 7035 Light grey.
  - Soft rubber profile: EPDM, similar to RAL 7021 Black grey.
- **Scope of supply**
  - 10 cable routers.
- **How supplied**
  - In sets

Version	Part No.	PU
Insertable	05.040.112.9	10 pc



## Fillister head screw

- IEC DIN 967
- **Scope of supply**
  - 50 fillister head screws, Form Z
- **How supplied**
  - In sets

W	H	D	Version	Part No.	PU
			M5 x 10	05.041.330.9	1 set
			M5 x 16	05.041.331.9	1 set
			M6 x 10	05.041.332.9	1 set
			M6 x 16	05.041.333.9	1 set



## Cage nuts

- Clips into profiles with hole matrix
- **Scope of supply**
  - 50 cage nuts, sheet metal, 1.5mm
- **How supplied**
  - In sets

Version	Part No.	PU
M5: sheet metal, 1.5 mm	05.041.513.7	1 set
M6: sheet metal, 1.5 mm	05.041.514.7	1 set



# Knürr Ergocon Mobile Drawer Units

## Knürr Ergocon Mobile Drawer Units

- Full extension drawers with softclose
  - Wooden construction
  - Front panels with segmented bow handles 160 mm
  - Double castors 37 mm, screwed to steel plate
  - 1/2/3 OU on full extension
  - All telescopic slides covered
  - Pull-out lock
  - Central locking system with exchangeable cylinder
  - One tilting key, one Standard key
- **Height units**
    - 1x1 OU (50 mm) material drawer
    - 1x2 OU (100 mm) drawer
    - 2x3 OU (150 mm) drawer
  - **Material / Surface**
    - Body and cover plate: Three-layer quality particleboard FP/Y E1 design, Fire protection class B2, direct coated
    - Drawer pan: Sheet steel in black
  - **Load capacity**
    - 400 N per double swivel castor
  - **Technical Data**
    - Drawer front panel in wood finish
    - Segmented bow handles: metal
  - **Normes**
    - Body and cover plate DIN 68765
    - EN 438 for high pressure laminate panels
- **Color Combinations**
    - **Final Digit .B:**
      - Body and cover plate : RAL 9006 White aluminum
      - Front panels: Nelson Oak
      - Segmented bow handles: matt nickel plated
    - **Final Digit .C:**
      - Body and cover plate : RAL 9006 White aluminum
      - Front panels: Pine Black
      - Segmented bow handles: matt nickel plated
    - **Final Digit .E:**
      - Body and cover plate : RAL 9006 White aluminum
      - Front panels: Beech wood design
      - Segmented bow handles: matt nickel plated
    - **Final Digit .F:**
      - Body and cover plate : RAL 9006 White aluminum
      - Front panels: Maple wood design
      - Segmented bow handles: matt nickel plated
    - **Final Digit .H:**
      - Body and cover plate : RAL 9006 White aluminum
      - Front panels: RAL 9006 White aluminum
      - Segmented bow handles: matt nickel plated
  - **Scope of supply**
    - 1 roll container
  - **How supplied**
    - Mounted



W	H	D	Model		Part No.	PU
435	516	500	1/2/2x3 OU	Nelson Oak	00.321.560.B	1 pc
435	516	500	1/2/2x3 OU	Pine Black	00.321.560.C	1 pc
435	516	500	1/2/2x3 OU	Beech	00.321.560.E	1 pc
435	516	500	1/2/2x3 OU	Maple	00.321.560.F	1 pc
435	516	500	1/2/2x3 OU	RAL9006 White aluminum	00.321.560.H	1 pc
Stopper bracket for Mobile Drawer Unit					04.501.001.7	1 Stk

**Dimensions in mm:** W = width  
H = height  
D = depth  
h = installation height  
t = usable depth  
L = length

RU = Number of standard height units, 1 RU = 44.45 mm  
19" = 482.6 mm,  
(suited to 19" installation acc. to DIN 41494)  
PU = package unit  
kg = weight

**Conversion:** 1 inch = 25.4 mm  
1 pound = 453.6 g

Replace 'x' with the last digit of your color choice

## Our Quality Promise:



Highest quality is  
guaranteed



10 years warranty  
on surfaces and  
mechanics



Up to 5 years  
warranty for lifting  
columns with up to  
10,000 lifting cycles

## Ergonomically designed products and solutions from a single source

**Vertiv Control Room Infrastructure** is worldwide known as competent and reliable partner for holistic control room solutions and mobile equipment carrier. The ergonomically designed Knürr products are internationally in use and convince in demanding 24h-Mission-Critical Control Room environment of multiple industrial sectors.

Learn more about Control Room Infrastructure solutions and services at [www.VertivCo.com](http://www.VertivCo.com) and [www.technical-furniture.com](http://www.technical-furniture.com).

### Vertiv Integrated Systems GmbH

Mariakirchener Straße 38  
94424 Arnstorf  
Germany  
T +49 8723 28 0  
F +49 8723 28 138

[furniture.knuerr@vertivco.com](mailto:furniture.knuerr@vertivco.com)  
[www.VertivCo.com](http://www.VertivCo.com)  
[www.technical-furniture.com](http://www.technical-furniture.com)

## Notes:

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

**VERTIV™**

## Notes:

This image shows a full page of blank white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page, providing a template for writing or drawing. There are no margins, text, or other markings present.



**Vertiv.co.uk** | Vertiv Infrastructure Limited, George Curl Way, Southampton, SO18 2RY, VAT Number: GB188146827

© 2017 Vertiv Co. All rights reserved. Vertiv™, the Vertiv logo, and Vertiv are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. Although every precaution has been taken to ensure accuracy and completeness, Vertiv Co. accepts no responsibility and is not liable for any errors or omissions, or any damage resulting from this information. Specifications are subject to change without prior notice.

09.991111.0.000001 • MKA4LOUKergo2 Rev1-12/2017