

ALEXANDER SCHNEIDER

THE POWER OF EXCELLENCE


INVENTORY CLEARANCE SALE!

We are reducing our inventory and offering **special, limited time only deals on top products!**

We will have a wide variety of products including Electronic Components, cables, connectors, and Smart PDUs. **Limited Quantities, so get them while we still have them!**

If you have any questions call 09-8924444 or email baruch@schneider.co.il today

Alexander Schneider is a leading provider of outstanding IT and OT infrastructure solutions for OEMs, enterprise, and IT Data center.

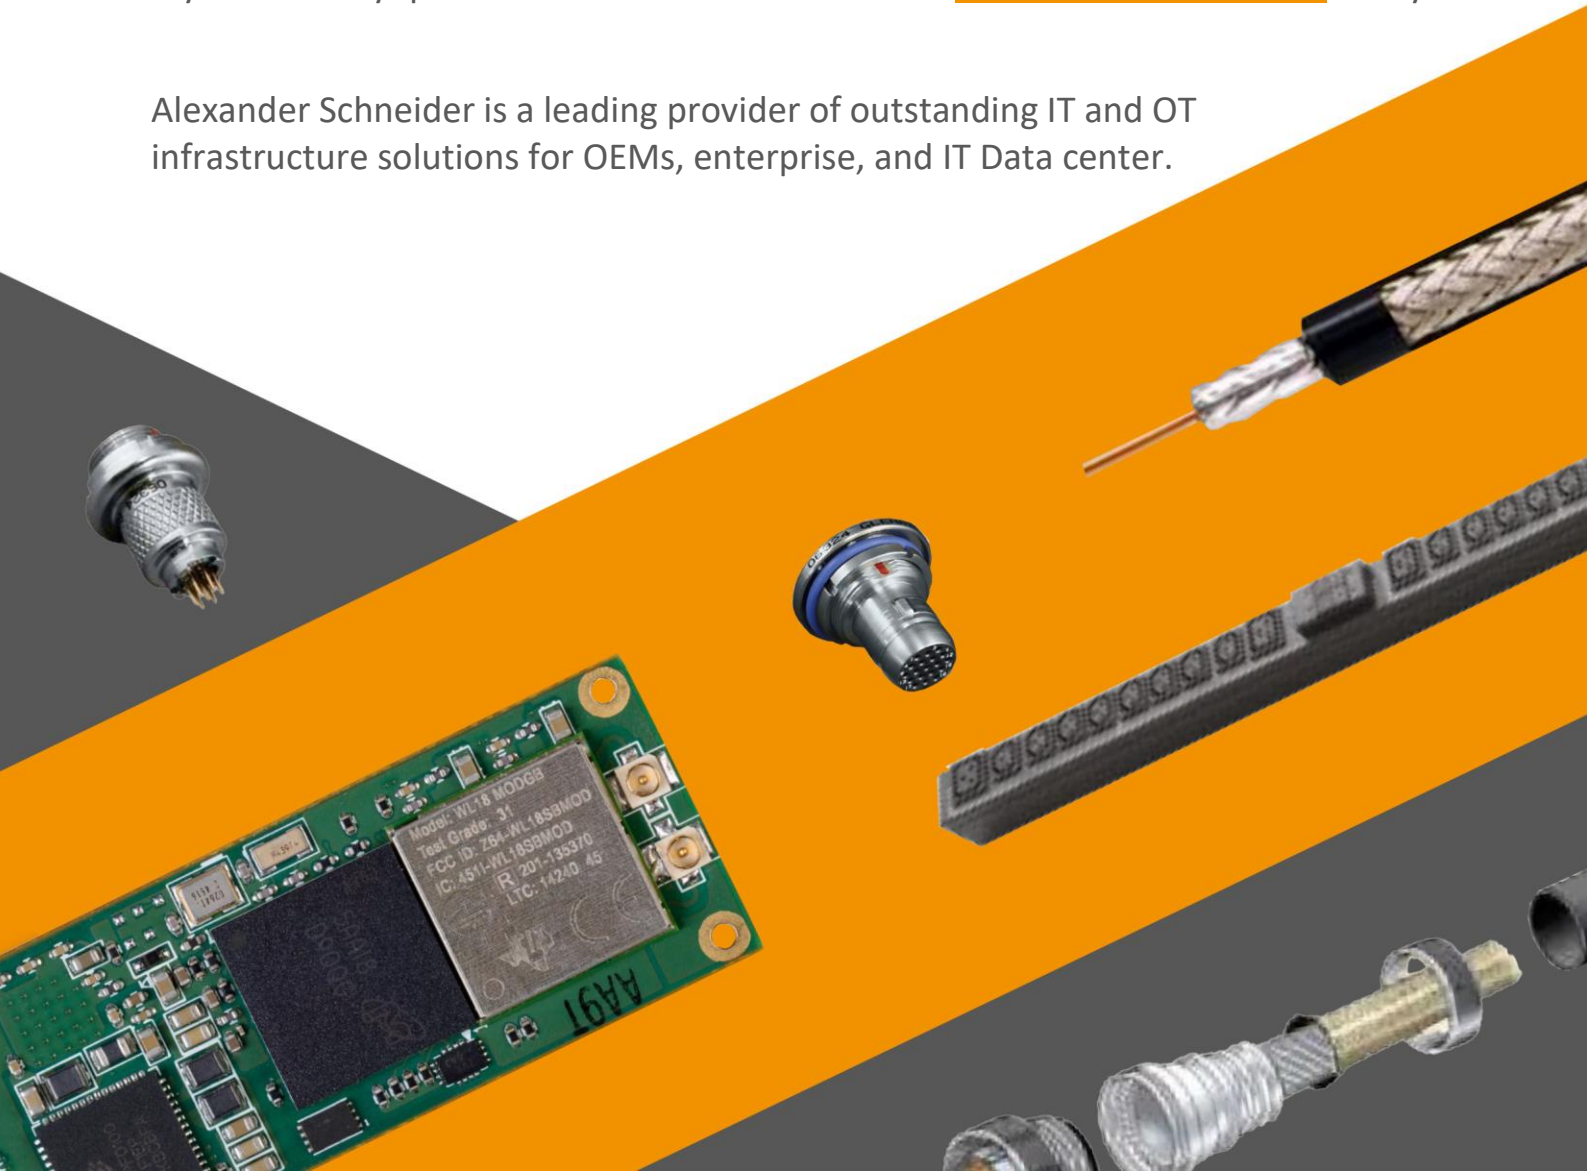

ELECTRONIC COMPONENTS



DART-MX6Q_800C_1024R

Variscite


- System on Module (SoM) / Computer on Module.
- CPU 800MHz, 1GB RAM, 8GB Storage, Compact size 50mm x 20mm.
- USB, ETH 10/100/1000, Serial interfaces and more.
- Without BT, Without Wi-Fi.



75 pcs



250 NIS / Unit



DART_MX6Q_800C_2048R

Variscite



- System on Module (SoM) / Computer on Module.
- CPU 800MHz, 2GB RAM, 16GB Storage, Compact size 50mm x 20mm.
- USB, ETH 10/100/1000, Serial interfaces and more.
- Without BT, Without Wi-Fi.



12 pcs



350 NIS / Unit

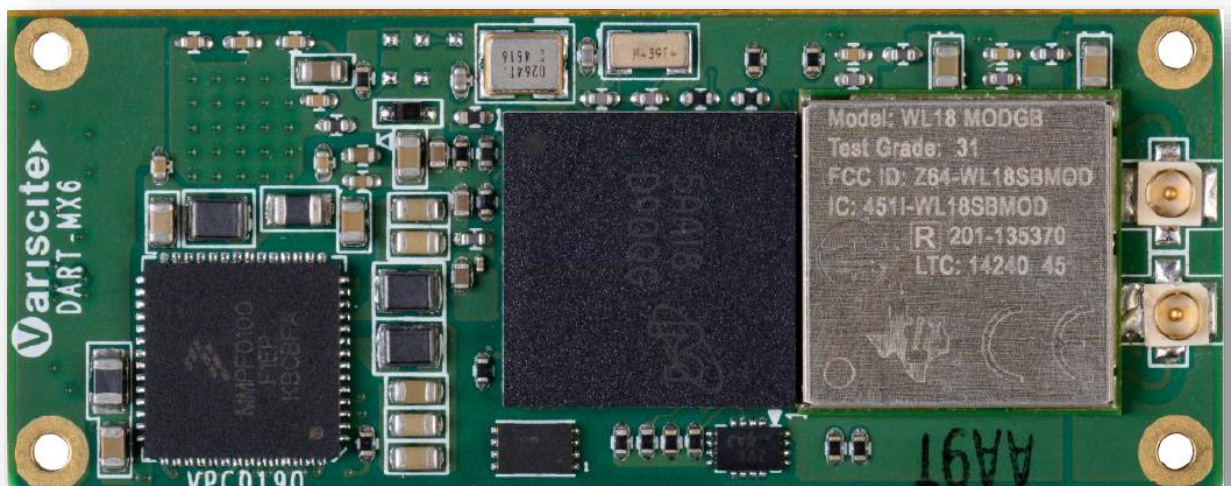

CABLING



311HS001NF0901



STRAIGHT SHRINK BOOT ADAPTER SIZE 9



56 pcs



230 NIS / Unit



311HS001NF1102



STRAIGHT SHRINK BOOT ADAPTER SIZE 11



84 pcs



250 NIS / Unit



311HS001NF1303



STRAIGHT SHRINK BOOT ADAPTER SIZE 13



28 pcs



390 NIS / Unit





LMR-240



CABLE COAX 50OHM 22AWG DOUBLE

Ideal for:


- Jumper Assemblies in Wireless Communications Systems.
- Short Antenna Feeder runs (e.g. WLL, GPS, LMR, Mobile Antennas).
- Any application (e.g. WLL, GPS, LMR, WLAN, WISP, WiMax, SCADA, Mobile Antennas) requiring an easily routed, low loss RF cable.



2955m



7 NIS / m (MOQ 100m)

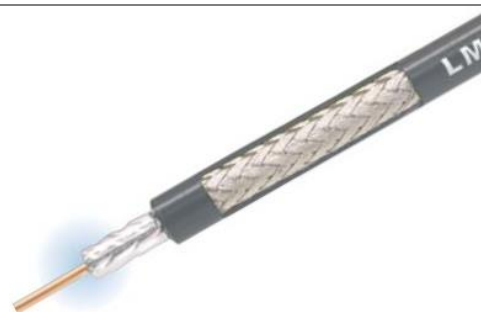

9294004139



Four-Pair 120 Ohm SF/UTP 4x2x26 AWG Cable

- Contains 4 twisted pairs, cabled together, double shielded with an aluminum foil and copper braid, and jacketed with FR-PVC compound.
- Compatible with the RJ-45 modular plug.
- Flame tests : UL 1581 VW-1, IEC 1034, IEC 754



2950m



6 NIS / m (MOQ 100m)



CONNECTORS

ALEXANDER
SCHNEIDER

THE POWER OF EXCELLENCE



807-216-07ZNU6-6DY




Net warrior PP Connector, Receptacle, Size 6, Female, 6 contacts, Rear mount, PC Tail



75 pcs



190 NIS / Unit

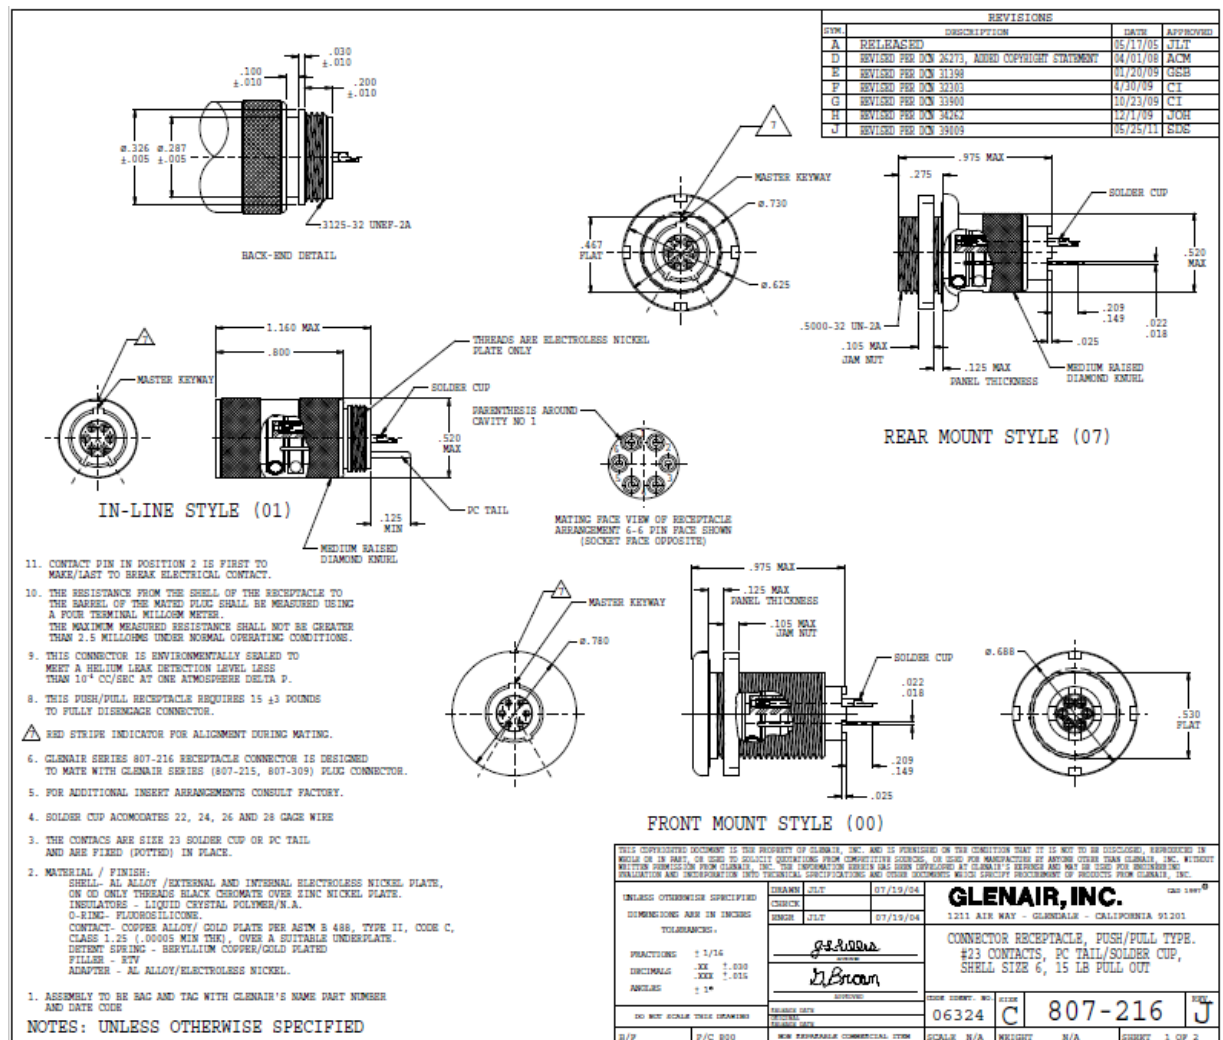



804-005-07NF8-13SA



PP Connector, Receptacle, Size 8, Female, 13 contacts, Rear mount, PC Tail.
Panel Mount Receptacles feature factory-installed non-removable contacts.

Choose solder cup or PC Tail terminals. Available in front or rear panel mount versions.

Water Immersion, Unmated

Specify 804-005 connectors for applications where open face water immersion is not a requirement. For MIL-STD-810 Method 512G immersion requirements, specify 804-020 watertight connectors. These 804-020 connectors are specially sealed ("MOD-518") and are 100% tested to maintain a helium leak rate of 1×10^{-4} cc/second at one atmosphere pressure differential from -40C to +70C.



75 pcs



190 NIS / Unit



804-009-07ZNU8-13PA



PP Connector, Plug, Size 8, 13 contacts, Rear mount, PC Tail.

Panel Mount Plugs save space inside the box compared to Series 804 removable contact receptacles. Factory-installed non-removable contacts. Solder cup or printed circuit board terminals. Available in front or rear panel and flange mount versions.

Ingress Protection, Unmated Specify 804-009 connectors for applications where open face water immersion is not a requirement. For IP67 ingress protection and MIL-STD-810 Method 512 immersion requirements, specify 804-021 watertight connectors certified to meet one atmosphere pressure differential in open face condition from -40° to +70°C.
"Push-Pull" Quick-Disconnect Canted spring securely retains the mating plug.



41 pcs



230 NIS / Unit

OFF-THE-SHELF SMART PDUS



STV-4503K/C

**Server
Technology**
A brand of legrand



Server Technology PRO2 Switched PDU, C13x24, C19x6, 3phase 230/400V 32A

The Server Technology PRO2 Switched PDU provides control of outlet power and local LED input current monitoring, allowing IT personnel to determine safe levels of loading on a per-phase basis while installing equipment into the rack/cabinet. The integral PIPS® technology provides billinggrade accurate measurement of current, voltage, active power, apparent power, power factor, crest factor, and accumulated energy at the input. These power data points, along with temperature and humidity measurements (provided via optional probes), are accessible through the built-in Web and CLI interfaces as well as through SNMP.

The PRO2 Switched "Primary" PDU can be connected to as many as three (with optional module) PRO2 Switched "Link" PDUs to extend the network access to the redundant or secondary power feed without the risks of a daisy chain linking configuration.



2 pcs



6,100 NIS / Unit





PX3-5551V-V2

Raritan
A brand of **legrand**




PDU C13x12, C19x12 ,3PH Delta 208-240V AC, 60A max, 17.3kVA at 208V, 20.0kVA at 240V.



2 pcs



4,900 NIS / Unit

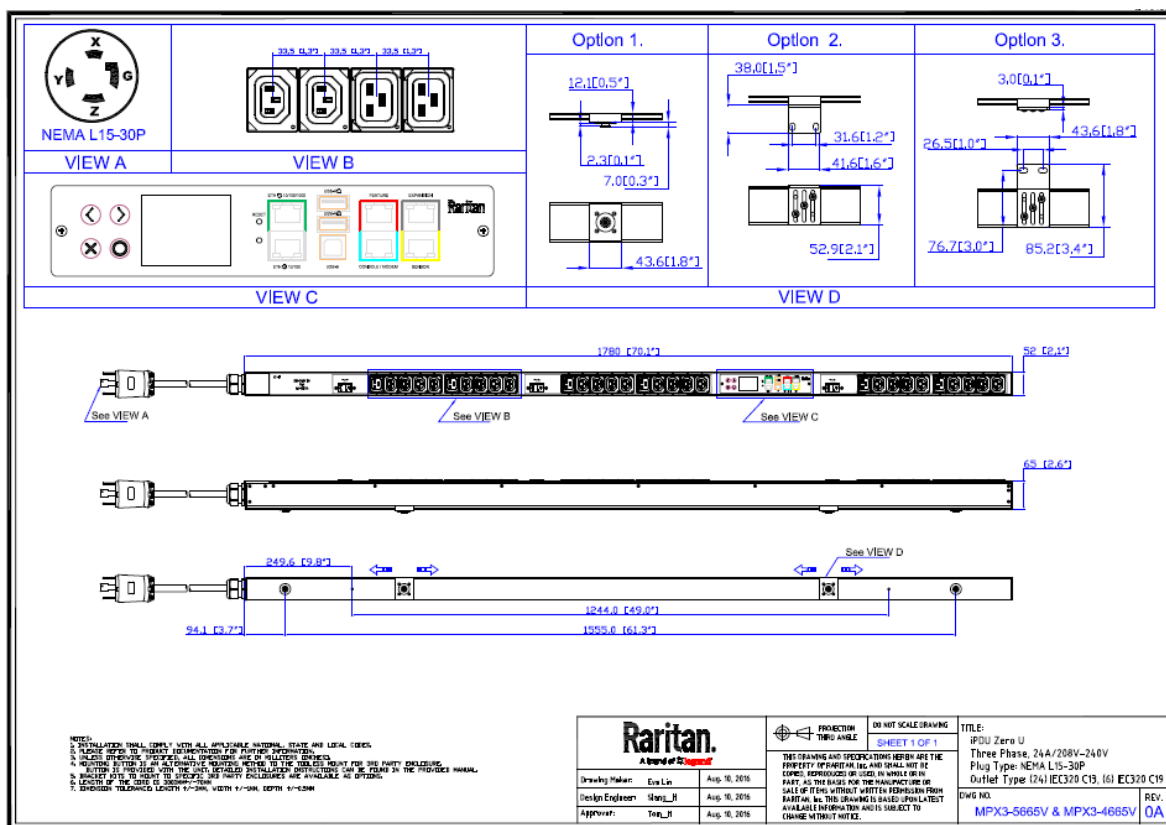



PX3-5528V-V2

Raritan®
A brand of **legrand**




PDU C13x18, C19x6, 3PH 380-415V AC, 32A max, 21.1kVA at 380V, 23.0kVA at 415V.



2 pcs



4,800 NIS / Unit

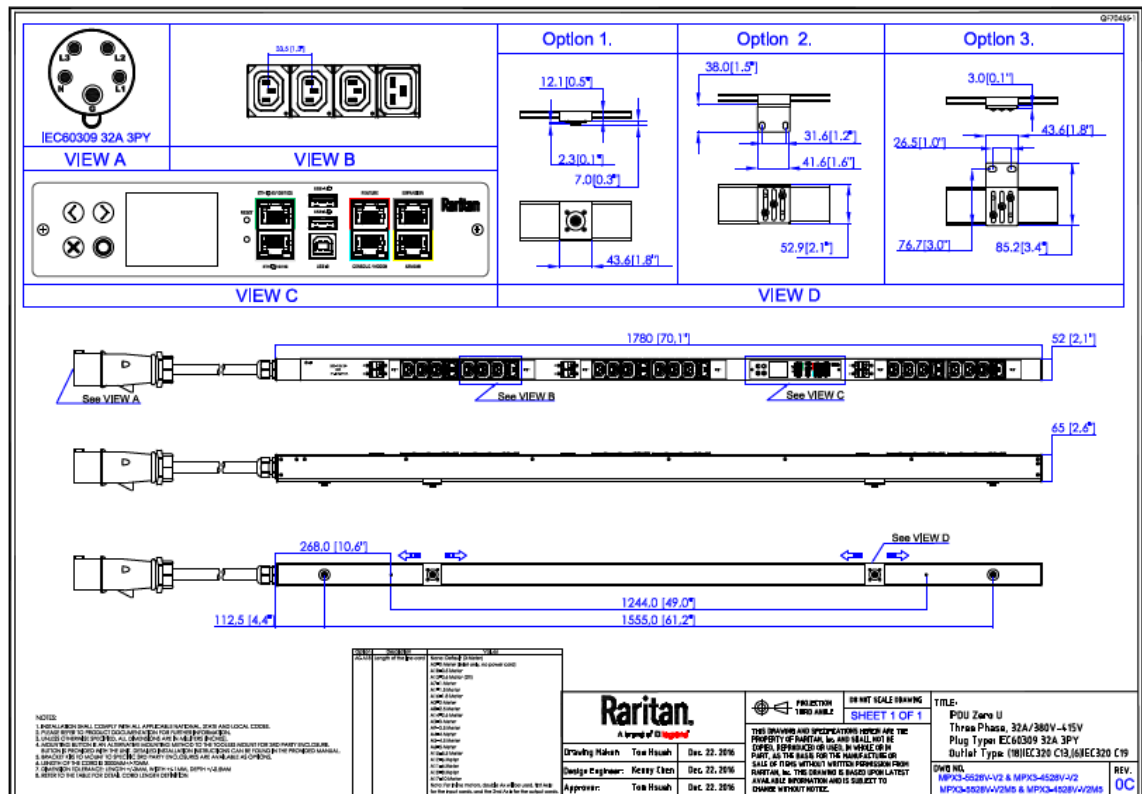

ALEXANDER SCHNEIDER

THE POWER OF EXCELLENCE

For more information please contact us



www.schneider.co.il
baruch@schneider.co.il



8a Hazoran St., Sapir Industrial Park,
Netanya, 4250608, Israel



+972-9-8924444
+972-9-8924455